


No. de Cores	Dimensoes do Condutor		Espessura (mm±0.05)	Largura (mm)	PT (mm)
	(AWG)	Composicao (solido/mm)			
9	28	7/0.102	0.9	11.43	±0.30
10	28	7/0.102	0.9	12.70	±0.30
14	28	7/0.102	0.9	17.78	±0.30
15	28	7/0.102	0.9	19.05	±0.30
16	28	7/0.102	0.9	20.32	±0.30
20	28	7/0.102	0.9	25.40	±0.30
25	28	7/0.102	0.9	31.75	±0.30
26	28	7/0.102	0.9	33.02	±0.30
30	28	7/0.102	0.9	38.10	±0.30
34	28	7/0.102	0.9	43.18	±0.40
36	28	7/0.102	0.9	45.72	±0.40
40	28	7/0.102	0.9	50.80	±0.40
50	28	7/0.102	0.9	63.50	±0.40
60	28	7/0.102	0.9	76.20	±0.40
64	28	7/0.102	0.9	81.28	±0.40

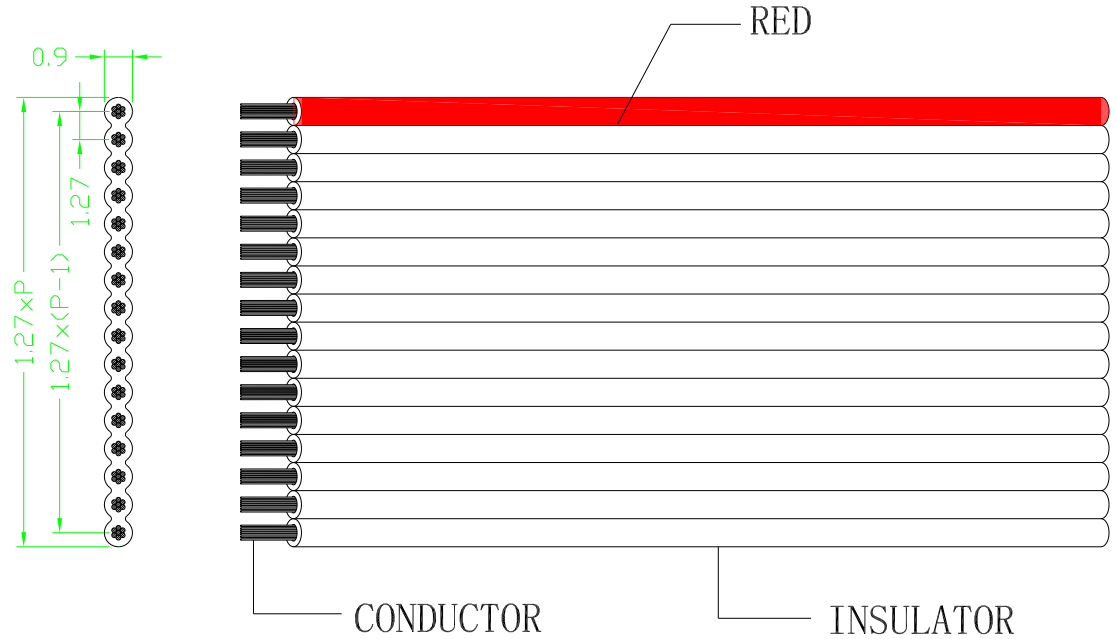

- CONDUCTOR: BARE COPPER 28AWG
- INSULATOR: MATERIAL PVC

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
		图名/File name	文件编号/File No.	x. ±0.2	x.° ±2°
		FLAT CABLE	页序/Sheet	.x ±0.1	.x° ±1°
		备注/Remark		.xx ±0.05	.xx° ±0.5°
				.xxx ±0.01	单位/Units: mm