



SILIZED FUSE LINK 400 V  
GR, SEMICOND. PROTECT. GR. D01 16 A

Similar to image

**Technical data:**

Operating class of the fuse link		gR (complete converter protection)
Color coding of the fuse link		others
Size of the fallback-system / acc. to DIN EN 60269-1		D01
Operating voltage / rated value	V	400
Operating current / rated value	A	16

**Certificates/approvals:**

General Product Approval	other
--------------------------	-------



[Environmental Confirmations](#)

**Further information:**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**


<http://www.siemens.com/lowvoltage/mall>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/5SE1316/all>

**Tender specifications**

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

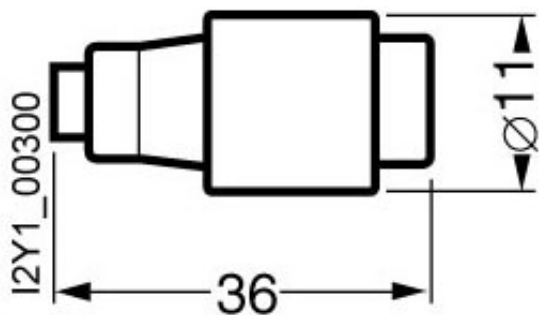

last change:

Oct 22, 2013