

Technical data sheet


Combination arrester, 4-pole



V 25-B+C/...: Combination arrester set, lightning and surge arrester Type 1+2 to DIN EN 61643-11 (B+C to VDE 0675 Part 6).

- With new Multibase base with multi connection terminals
- Complete unit consisting of cover and base, pre-mounted and ready for connection
- For TN systems
- Plug-in arrester with dynamic isolating device
- With visual function display
- Voltage protection level • Encapsulated non-extinguishing zinc oxide varistor arrester for use in standard distributor housings
- Marked connections

Application example: Building with open-wire power supply or for setting up lightning protection equipotential bonding in residential buildings.

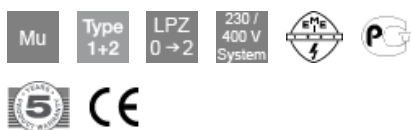

Type	Max. continuous operating voltage V	Version	Pack. pcs	Weight kg/100 pcs.	Art.-No.
V25-B+C 1-280	280	1-pole	1	15.300	5094418
V25-B+C 2-280	280	2-pole	1	28.500	5094421
V25-B+C 3-280	280	3-pole	1	42.500	5094423
V25-B+C 4-280	280	4-pole	1	53.000	5094426

/pc.