


**DV M TT 255 (951 310)**


- Prewired spark-gap-based combined lightning current and surge arrester consisting of a base part and plug-in protection modules
- Maximum system availability due to RADAX Flow follow current limitation
- Capable of protecting terminal equipment



Figure without obligation



Basic circuit diagram DV M TT 255

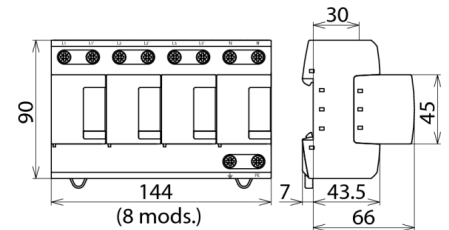

Dimension drawing DV M TT 255

Modular combined lightning current and surge arrester for TT and TN-S systems ("3+1" circuit)

Type	DV M TT 255
Part No.	951 310
SPD according to EN 61643-11 / IEC 61643-1/-11	Type 1 / Class I
Energy coordination with terminal equipment	Type 1 + Type 2
Energy coordination with terminal equipment (≤ 5m)	Type 1 + Type 2 + Type 3
Nominal a.c. voltage (U <sub>N</sub> )	230 / 400 V
Max. continuous operating a.c. voltage (U <sub>C</sub> )	255 V
Lightning impulse current (10/350 μs) [L1+L2+L3+N-PE] (I <sub>total</sub> )	100 kA
Specific energy [L1+L2+L3+N-PE] (W/R)	2.50 MJ/ohms
Lightning impulse current (10/350 μs) [L-N]/[N-PE] (I <sub>imp</sub> )	25 / 100 kA
Specific energy [L-N]/[N-PE] (W/R)	156.25 kJ/ohms / 2.50 MJ/ohms
Nominal discharge current (8/20 μs) (I <sub>n</sub> )	25 / 100 kA
Voltage protection level [L-N]/[N-PE] (U <sub>p</sub> )	≤ 1.5 kV / ≤ 1.5 kV
Response time (t <sub>a</sub> )	≤ 100 ns
Follow current extinguishing capability [L-N]/[N-PE] (I <sub>h</sub> )	50 kA <sub>rms</sub> / 100 A <sub>rms</sub>
Follow current limitation/Selectivity	no tripping of a 20 A gL/gG fuse up to 50 kA <sub>rms</sub> (prosp.)
Max. backup fuse (L) up to I <sub>K</sub> = 50 kA <sub>rms</sub>	315 A gL/gG
Max. backup fuse (L-L')	125 A gL/gG
Temporary overvoltage (TOV) [L-N] (U <sub>T</sub> )	440 V / 5 sec.
Temporary overvoltage (TOV) [N-PE] (U <sub>T</sub> )	1200 V / 200 ms
TOV characteristic	withstand
Operating temperature range [parallel]/[series] (T <sub>U</sub> )	-40°C...+80°C / -40°C...+60°C
Operating state/fault indication	green / red
Number of ports	1
Cross-sectional area (L1, L1', L2, L2', L3, L3', N, N', PE, ⚡) (min.)	10 mm <sup>2</sup> solid/flexible
Cross-sectional area (L1, L2, L3, N, PE) (max.)	50 mm <sup>2</sup> stranded/35 mm <sup>2</sup> flexible
Cross-sectional area (L1', L2', L3', N', ⚡) (max.)	35 mm <sup>2</sup> stranded/25 mm <sup>2</sup> flexible
For mounting on	35 mm DIN rails acc. to EN 60715
Enclosure material	thermoplastic, red, UL 94 V-0
Place of installation	indoor installation
Degree of protection	IP 20
Capacity	8 module(s), DIN 43880
Approvals	KEMA, VDE, UL, VdS
<b>Extended technical data:</b>	<b>Use in installations with prospective short-circuit currents of more than 50 kA<sub>rms</sub> (tested by VDE)</b>
- Maximum prospective short-circuit current	100 kA <sub>rms</sub> (220 kA <sub>peak</sub> )
- Limitation/extinction of mains follow currents	up to 100 kA <sub>rms</sub> (220 kA <sub>peak</sub> )
- Max. backup fuse (L) up to I <sub>K</sub> = 100 kA <sub>rms</sub>	315 A gL/gG
Weight	1,27 kg
Customs tariff number	85363030
GTIN	4013364108172
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.