

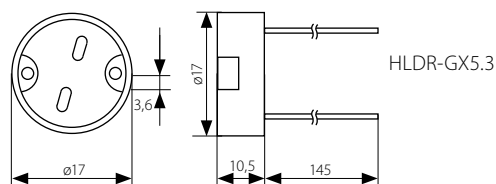


# HLDR

Oprawka ceramiczna  
Keramická objímka  
Keramicá objímka

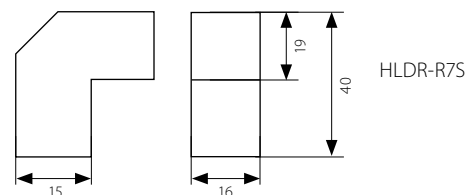

- korpus: ceramika
- těleso: keramika
- teleso: keramika

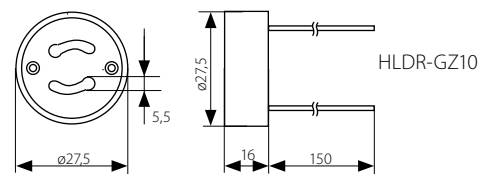

■ HLDR-GZ10



■ HLDR-GX5.3



■ HLDR-R7S

Kanlux									DKC CZ	DKC SK
HLDR-GZ10	00402	5905339004024	250V~	szary / šedá / šedá	GU10/GZ10	15cm, 2x0,75mm <sup>2</sup>	500/20	19	10,00 Kč	16,00 Sk
HLDR-R7S	00405	5905339004055	250V~	szary / šedá / šedá	R7s	25cm, 2x0,75mm <sup>2</sup>	500/10	17	7,00 Kč	9,00 Sk
HLDR-GX5.3	72109	5905339721099	24V	szary / šedá / šedá	G4-GY6,35	15cm, 2x0,75mm <sup>2</sup>	2000/100	7	7,00 Kč	9,00 Sk

- maksymalny dopuszczalny prąd I dla HLDR-GZ10 wynoszący 2A, dla HLDR-R7S wynoszący 6A, dla HLDR-GX5.3 wynoszący 5A / maximální proud HLDR-GZ10 je 2A, u HLDR-R7S je 6A, u HLDR-GX5.3 je 5A / maximální prúd HLDR-GZ10 je 2A, u HLDR-R7S je 6A u HLDR-GX5.3 je 5A
- maksymalna dopuszczalna temperatura oprawki HLDR-GZ10 wynosząca 250°C / maximální přípustná teplota objímky u HLDR-GZ10 je 250°C / maximálna prípustná teplota objímky u HLDR-GZ10 je 250°C