



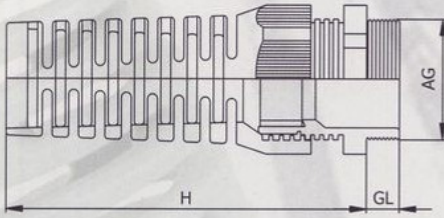

### PG THREAD SPIRAL CABLE GLANDS PG DİŞ SPIRAL UÇLU KABLO RAKORU

|                                   |   |
|-----------------------------------|---|
| Material                          | Polyamide 6   |
| Colour                            | RAL 7001 (Gray)<br>RAL 7035 (L. Gray)<br>RAL 9005 (Black) |
| Protection Class                  | IP 68   |
| Permanent operational temp.       | - 40 C° to + 100 C°                                       |
| Short term max. Operational temp. | +150 C°   |
| Seal                              | Thermoplastic Rubber                                      |

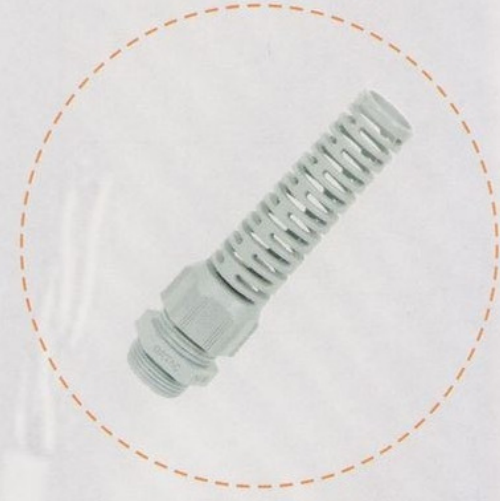

|                           |   |
|---------------------------|---|
| Hammaddesi                | Polyamide 6   |
| Renk                      | RAL 7001 (Gri)<br>RAL 7035 (Açık Gri)<br>RAL 9005 (Siyah) |
| Koruma sınıfı             | IP 68   |
| Sürekli ısıya direnci     | -40 C° + 100 C°   |
| Kısa süreli ısıya direnci | +150 C°   |
| Conta                     | Termoplastik Kauçuk                                       |

#### PG THREAD SPIRAL CABLE GLANDS / PG DİŞ SPIRAL UÇLU KABLO RAKORU

| AG Thread | Gray Code | L. Gray Code | Black Code | H mm. | GL mm. | mm. | Clamping Range |
|-----------|-----------|--------------|------------|-------|--------|-----|----------------|
| Dış Çapı  | Gri Kodu  | A. Gri Kodu  | Siyah Kodu |       |        |     | Sıkma Çapı mm. |
| PG 7      | ORG-19    | ORL-19       | ORB-19     | 57,2  | 8      | 15  | 3-6,5          |
| PG 9      | ORG-20    | ORL-20       | ORB-20     | 70,4  | 8      | 19  | 4-8            |
| PG 11     | ORG-21    | ORL-21       | ORB-21     | 81,3  | 8      | 22  | 5-10           |
| PG 13,5   | ORG-22    | ORL-22       | ORB-22     | 89,2  | 9      | 24  | 6-12           |
| PG 16     | ORG-23    | ORL-23       | ORB-23     | 107,2 | 9      | 27  | 10-14          |
| PG 21     | ORG-24    | ORL-24       | ORB-24     | 124,3 | 11     | 33  | 13-18          |