


LX1FJ380

TeSys F - contactor coil - LX1FJ - 380...400V
AC 40...400 Hz

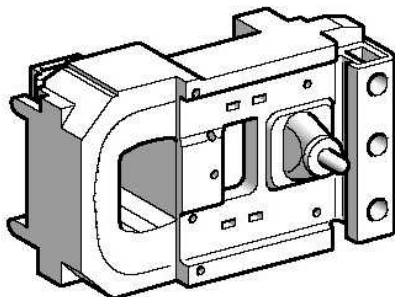

Main

Range of product	TeSys F
Product or component type	Contactor coil
Device short name	LX1FJ
Control circuit type	AC 40...400 Hz
Control circuit voltage	380...400 V AC 40...400 Hz
Average resistance	3310 Ohm holding at 20 °C 120 Ohm inrush at 20 °C
Inductance of closed circuit	15.8 H
Product compatibility	LC1F400
Operating time	40...75 ms closing 100...170 ms opening
Mechanical durability	10 Mcycles
Operating rate	2400 cyc/h at <= 55 °C

Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	0.3...0.5 Uc at 55 °C drop-out 40...400 Hz 0.85...1.1 Uc at 55 °C operational 40...400 Hz
Inrush power in VA	1075 VA at 20 °C (cos φ 0.9) 40...400 Hz
Hold-in power consumption in VA	15 VA at 20 °C (cos φ 0.3) 40...400 Hz
Heat dissipation	14 W at 40...400 Hz

Environment

Ambient air temperature for operation	> -5...55 °C
Product weight	1 kg

Contractual warranty

Period	18 months
--------	-----------

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.